

VERTICAL / STANDARD (ISCL -V)

Size (Mtr)	Weight (Kg)
1.0	4.96
1.3	5.92
1.5	7.43
1.8	8.34
2.0	9.91
2.5	12.38
3.0	14.82



ADJUSTABLE BEAM SPAN (ISCL -ABS)

Combination	Minimum	Maximum	Name of Member	Length
ESO + ESI	1900	2650	Extra Short Outer	1500 mm
SO + ESI	2650	3650	Short Outer	2500 mm
SO + SI	2650	3650	Long Outer	3000 mm
SO + LI	3150	4400	Extra Short Inner	1500 mm
LO + SI	3150	4900	Short Inner	2500 mm
LO + SI	3150	5400	Long Inner	3000 mm



DECKING BEAM (ISCL -DB)

ACCESSORIES



ISCLA-BC

Bottom Cup



ISCLA-LB

Ledger Blade



ISCLA-TC

Top Cup



ISCLA-S

Spigot



HORIZONTAL / LEDGER (ISCL -H)

Size (Mtr)	Weight (Kg)
0.60	2.36
0.90	3.39
1.00	3.74
1.20	4.43
1.30	4.77
1.60	5.81
1.80	6.50
2.50	8.91




INTERMEDIATE TRANSOM (ISCL -IT)

Size (Mtr)	Weight (Kg)
0.565	5.60
0.795	6.42
1.200	7.85
1.300	8.22
1.800	10.0
2.500	12.5




INSIDE BOARD TRANSOM (ISCL -IBT)

Size (Mtr)	Weight (Kg)
1.621	7.50



FACE BRACE (ISCL -FB)

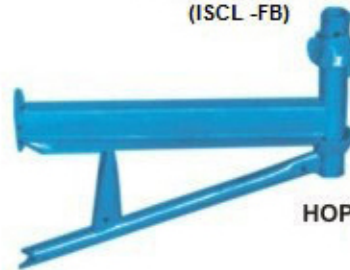

HOP-UP BRACKET (ISCL-HUB)



DROP HEAD (ISCL -DH)

